

Technical Data Sheet SBP-8106-010

SUPERLIFT BUCKET - 10,8 L

- Colour: white
- External diameter top: 269 mm \pm 3 mm
- External diameter bottom: 228.5 mm \pm 1 mm
- Height: 249.8 mm \pm 1 mm
- Weight: 260 g \pm 13 g
- Weight plastic handle: 11 g \pm 1.1 g
- Full pallet = 468 pcs

Stackability – dynamic: Max: 40 kg top load on bottom container at 23°

Stacking tests: The stacking tests have been performed to the standard virgin raw material as stated below at 23°C over a period of 2 months. Stackability depends on many factors and the above data is meant as an indication only. Consequently, customers should make internal trials to determine the viability of stacking and transportation.

Lid type options: Membrane, Standard, Special, Wipes fitment

Handle: Flexible plastic on collar

Closure type: Peel-off

Protective collar: Yes

Tamper Evidence type: Tamper Evidence tab

Raw material options: PP



Hot filling: 85-95°C

Hot temperatures: The material chosen has a very good heat resistance and the packaging is suitable for hot filling. Notably, plastic packaging becomes flexible when subjected to hot filling temperatures and care must be taken in relation to stacking immediately after hot filling. The packaging must be tested by the customer with the actual product before approval for use at hot temperatures.

Cold temperatures: Freezing conditions require special resins available on request. The packaging must be tested by the customer with the actual product before approval for use at low temperatures.



Without lid

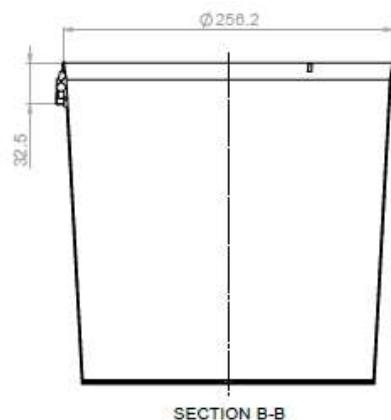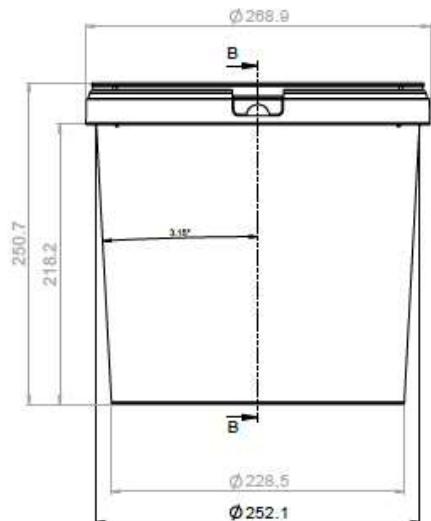

Stacking

